

[Get a Quote](#)

## Overview

C921-4P is the Cisco 921 Gigabit Ethernet security router with internal power supply. Cisco 900 Series ISRs deliver integrated security and threat defense, protecting networks from both known and new Internet vulnerabilities and attacks. These powerful, fixed-configuration routers provide secure broadband and Metro Ethernet connectivity. Service providers offering managed Ethernet WAN services can deploy them in customer locations as CPE. Centralized and remote management capabilities are available through web-based tools and Cisco IOS® Software for full visibility and control of network configurations at the remote site. The 900 Series ISRs simplify the deployment of Ethernet WAN services, with end-to-end Operations, Administration, and Maintenance (OA&M), Service-Level Agreement (SLA) monitoring and verification, and configuration management. This series ISRs come with a 4-port managed switch, providing LAN ports to connect multiple devices.


## Quick Spec

Table 1 shows the quick spec.

SKU	C921-4P
WAN interfaces	2 ports Gigabit Ethernet (GE)
LAN interfaces	4-port GE managed switch
Integrated USB 2.0	Yes
Default and maximum DRAM	Default 1 GB
Default and maximum flash memory	2 GB; not upgradable
Dimensions (H x W x D)	1.70 x 9.0 x 9.5 in. (4.32 x 22.86 x 24.13 cm) (includes rubber feet)

## Product Details

Figure 1 shows the front panel of C921-4P.

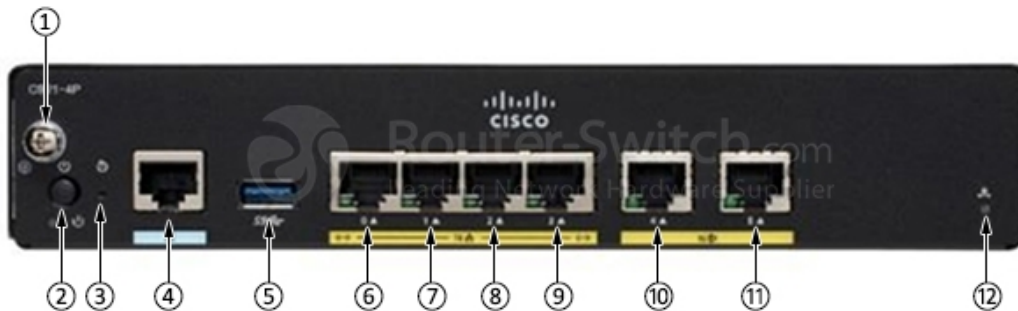

Note:

(1)	#6-32 Ground screw	(7)	GE LAN port
(2)	Power button	(8)	GE LAN port
(3)	Reset button	(9)	GE LAN port
(4)	Console Port	(10)	GE WAN port
(5)	USB2.0 port	(11)	GE WAN port
(6)	GE LAN port	(12)	VPN LED

Figure 2 shows the back panel of C921-4P.



Note: (1) Power Connector

## The Options

Table 2 shows the optional accessories.

Model	Description
CAB-C13-ACB	AC Power Cord (Brazil), C13, NBR 14136, 2.1M
<a href="#">CAB-ACE=</a>	AC Power Cord (Europe), C13, CEE 7, 1.5M
CAB-ACC	Power Cord - China
CAB-IND	AC Power Cord (India)
<a href="#">CAB-AC=</a>	AC Power Cord (North America), C13, NEMA 5-15P, 2.1m
<a href="#">CAB-ACI=</a>	AC Power Cord (Italy), C13, CEI 23-16, 2.5m
PWR-CORD-KOR-B	Power Cord for South Korea 2m 10A
CAB-JPN	AC Power Cord (Japan), C13, JIS C 8303, 2.5m
CAB-C13-C14-2M-JP	Power Cord C13-C14, 2M/6.5ft Japan PSE mark
CAB-ACTW	AC Power Cord (Taiwan), C13, EL 302, 2.3M
CAB-3P-JPN	AC Power Cord (Japan), C13, 3 Prong Plug, 2.3M
CAB-ACA	AC Power Cord (Australia), C13, AS 3112, 2.5m
PWR-CORD-ZAF-D	Power Cord South Africa
<a href="#">CAB-CONSOLE-RJ45</a>	Console Cable 6ft with RJ45 and DB9F
CAB-CONAUX	Straight serial cable - RJ45 to DB25 male
<a href="#">CAB-ETH-S-RJ45</a>	Yellow Cable for Ethernet, Straight-through, RJ-45, 6 feet

## Compare to Similar Item

Table 3 shows the comparison.

Model	WAN interfaces	LAN interfaces	Integrated USB 2.0
C921-4P	2 ports Gigabit Ethernet (GE)	4-port GE managed switch	Yes
<a href="#">C931-4P</a>	2 ports GE	4-port GE managed switch	Yes

<a href="#">C927-4P</a>	1 port GE and 1 VADSL (Annex A)	4-port GE managed switch	Yes
<a href="#">C926-4P</a>	1 port GE and 1 VADSL (Annex B/J)	4-port GE managed switch	Yes
<a href="#">C927-4PM</a>	1 port GE and 1 VADSL (Annex M)	4-port GE managed switch	Yes

## Get More Information

Do you have any question about the C921-4P?

Contact us now via [Live Chat](#) or [sales@router-switch.com](mailto:sales@router-switch.com).

## Specification

<b>C921-4P Specification</b>	
WAN interfaces	2 ports Gigabit Ethernet (GE)
LAN interfaces	4-port GE managed switch
Integrated USB 2.0	Yes
Maximum crypto throughput (bit-rate policed)	150 Mbps
<b>Cisco IOS Software</b>	
IP and IP services	<ul style="list-style-type: none"> <li>● Routing Information Protocol Versions 1 and 2 (RIPv1 and RIPv2)</li> <li>● Generic Routing Encapsulation (GRE) and Multipoint GRE (MGRE)</li> <li>● Cisco Express Forwarding</li> <li>● Standard 802.1d Spanning Tree Protocol</li> <li>● Layer 2 Tunneling Protocol (L2TP)</li> <li>● L2TP Version 3 (L2TPv3)</li> <li>● Network Address Translation (NAT)</li> <li>● Dynamic Host Configuration Protocol (DHCP) server, relay, and client</li> <li>● Dynamic DNS</li> <li>● DNS Proxy</li> <li>● DNS Spoofing</li> <li>● Access Control Lists (ACLs)</li> <li>● IPv4 and IPv6 multicast</li> <li>● Open Shortest Path First (OSPF)</li> <li>● Border Gateway Protocol (BGP)</li> <li>● Performance Routing (PfR)</li> <li>● Enhanced Interior Gateway Routing Protocol (EIGRP)</li> <li>● Virtual Route Forwarding (VRF) Lite</li> <li>● Next Hop Resolution Protocol (NHRP)</li> <li>● Bidirectional Forwarding Detection (BFD)</li> <li>● Web Cache Communication Protocol (WCCP)</li> </ul>
xDSL	<ul style="list-style-type: none"> <li>● True Multimode VDSL2 and ADSL2+ over Annex A, B, J, and M, including traditional G.DMT and T1.413</li> <li>● World-class interoperability with industry-standard DSL Access Multiplexer (DSLAM) chipsets</li> <li>● Highest field reliability with Impulse Noise Protection (INP) over Repetitive Electrical Impulse Noise (REIN) and single isolated impulse noise (SHINE), extended INP delay, G.INP, physical layer retransmission, Seamless Rate Adaptation (SRA), and Bitswap</li> <li>● VDSL2 Persistent Storage Device (PSD) profiles up to 17a/b with support for spectral shaping</li> <li>● VDSL2 vectoring to offer blazing fiber speeds over copper</li> <li>● Remote management with TR069 and CWMP</li> <li>● Investment protection with Gigabit Ethernet</li> </ul>
Switch features	<ul style="list-style-type: none"> <li>● Auto Media Device In/Media Device Cross Over (MDI-MDX)</li> <li>● 25 802.1Q VLANs</li> <li>● MAC filtering</li> <li>● Switched Port Analyzer (SPAN)</li> <li>● Storm control</li> <li>● Smart ports</li> <li>● Secure MAC address</li> <li>● Internet Group Management Protocol Version 3 (IGMPv3) snooping</li> <li>● 802.1X</li> </ul>

Security features	<p>Secure connectivity:</p> <ul style="list-style-type: none"> <li>● Secure Sockets Layer (SSL) VPN for secure remote access</li> <li>● Hardware-accelerated DES, 3DES, AES 128, AES 192, and AES 256</li> <li>● Public-Key-Infrastructure (PKI) support</li> <li>● 50 IPsec tunnels</li> <li>● Cisco Easy VPN client and server</li> <li>● NAT transparency</li> <li>● Dynamic Multipoint VPN (DMVPN)</li> <li>● Tunnel-less Group Encrypted Transport VPN (GET VPN)</li> <li>● VRF-aware IPsec</li> <li>● IPsec over IPv6</li> <li>● Adaptive control technology</li> <li>● Session Initiation Protocol (SIP) application-layer gateway</li> <li>● Cisco IOS Firewall: <ul style="list-style-type: none"> <li>○ Zone-based policy firewall</li> <li>○ VRF-aware stateful inspection routing firewall</li> <li>○ Stateful inspection transparent firewall</li> </ul> </li> <li>● Advanced application inspection and control</li> <li>● HTTPS, FTP, and Telnet Authentication Proxy</li> <li>● Dynamic and static port security</li> <li>● Firewall stateful failover</li> <li>● VRF-aware firewall</li> <li>● Cisco IOS Software black and white lists</li> <li>● Integrated threat control: <ul style="list-style-type: none"> <li>○ Intrusion Prevention System (IPS)</li> </ul> </li> <li>● Control plane policing</li> <li>● Flexible packet matching</li> <li>● Network foundation protection</li> </ul>
Quality of Service (QoS)	<ul style="list-style-type: none"> <li>● Low-Latency Queuing (LLQ)</li> <li>● Weighted Fair Queuing (WFQ)</li> <li>● Class-Based WFQ (CBWFQ)</li> <li>● Class-Based Traffic Shaping (CBTS)</li> <li>● Class-Based Traffic Policing (CBTP)</li> <li>● Policy-Based Routing (PBR)</li> <li>● Class-Based QoS MIB</li> <li>● Class of Service (CoS)-to-Differentiated Services Code Point (DSCP) mapping</li> <li>● Class-Based Weighted Random Early Detection (CBWRED)</li> <li>● Network-Based Application Recognition (NBAR)</li> <li>● Link Fragmentation and Interleaving (LFI)</li> <li>● Resource Reservation Protocol (RSVP)</li> <li>● Real-Time Transport Protocol (RTP) header compression (cRTP)</li> <li>● Differentiated Services (DiffServ)</li> <li>● QoS preclassify and prefragmentation</li> <li>● Hierarchical QoS (HQoS)</li> </ul>
Management	<ul style="list-style-type: none"> <li>● Cisco Configuration Professional</li> <li>● Cisco Configuration Express</li> <li>● Cisco Configuration Engine support</li> <li>● Cisco AutoInstall</li> <li>● Cisco IP Service-Level Agreement (IP SLA)</li> <li>● Cisco IOS Embedded Event Manager (EEM)</li> <li>● CiscoWorks</li> <li>● Cisco Security Manager</li> <li>● Telnet, Simple Network Management Protocol Version 3 (SNMPv3), Secure Shell (SSH) Protocol, Command-Line Interface (CLI), and HTTP management</li> <li>● RADIUS and TACACS+</li> <li>● Cisco Next Generation Plug-and-Play (NG PnP) Protocol</li> </ul>
High availability	<ul style="list-style-type: none"> <li>● Virtual Router Redundancy Protocol (VRRP) (RFC 2338)</li> <li>● HSRP</li> <li>● MHSRP</li> </ul>
Metro Ethernet	<ul style="list-style-type: none"> <li>● Ethernet OA&amp;M</li> <li>● Ethernet Local Management Interface (E-LMI)</li> <li>● IP SLA for Ethernet</li> </ul>

IPv6	<ul style="list-style-type: none"> <li>● IPv6 addressing architecture</li> <li>● IPv6 name resolution</li> <li>● IPv6 statistics</li> <li>● IPv6 translation: Transport packets between IPv6-only and IPv4-only endpoints (NAT-Protocol Translation)</li> <li>● Internet Control Message Protocol Version 6 (ICMPv6)</li> <li>● IPv6 DHCP</li> <li>● OSPFv3</li> <li>● BGP4+</li> <li>● IPv6 Path Maximum Transmission Unit (PMTU)</li> <li>● IPv6 neighbor discovery</li> <li>● IPv6 stateless address autoconfiguration (SLAAC)</li> <li>● IPv6 multicast routing</li> </ul>
Application visibility and control	<ul style="list-style-type: none"> <li>● NBAR2</li> <li>● Flexible NetFlow (FNF)</li> <li>● Performance Agent</li> </ul>
Number of recommended users	<ul style="list-style-type: none"> <li>● 50</li> </ul>
Default and maximum DRAM	<ul style="list-style-type: none"> <li>● Default 1 GB</li> </ul>
Default and maximum flash memory	<ul style="list-style-type: none"> <li>● 2 GB on all Cisco 900 Series ISR models; not upgradable</li> </ul>
WAN	<ul style="list-style-type: none"> <li>● Refer to Table 2 for details</li> </ul>
LAN switch	<ul style="list-style-type: none"> <li>● Refer to Table 2 for details</li> </ul>
Separate console ports	<ul style="list-style-type: none"> <li>● RJ-45</li> </ul>
USB 2.0	<ul style="list-style-type: none"> <li>● One USB 2.0 Type A port</li> </ul>
Physical dimensions	H x W x D = 1.70 x 9.0 x 9.5 in. (4.32 x 22.86 x 24.13 cm) (includes rubber feet)
Power supply	<p>Power specifications:</p> <ul style="list-style-type: none"> <li>● AC input voltage: Universal 100 to 240 VAC</li> <li>● Frequency: 50 to 60 Hz</li> <li>● Internal power supply (C921-4P and C931-4P only)</li> </ul>
Approvals and compliance	<p>Safety:</p> <ul style="list-style-type: none"> <li>● IEC 60950-1</li> <li>● UL 60950-1</li> <li>● CAN/CSA C22.2 No. 60950-1</li> <li>● EN 60950-1</li> <li>● AS/NZS 60950.1</li> <li>● Class I Equipment (C921-4P and C931-4P only)</li> <li>● Class III Equipment (C927-4P, C927-4PM, and C926-4P only)</li> </ul> <p>Emissions:</p> <ul style="list-style-type: none"> <li>● 47 CFR Part 15: 2006 <ul style="list-style-type: none"> <li>○ CISPR22: Edition 6.0: 2008</li> <li>○ CNS13438: 2006</li> <li>○ EN 300 386 V1.6.1</li> <li>○ EN 55032</li> <li>○ EN61000-3-2: 2006 [+ amd 1 &amp; 2]</li> <li>○ EN61000-3-3: 2008</li> <li>○ ICES-003 Issue 5: 2012</li> <li>○ KN 22: 2009</li> </ul> </li> <li>● TCVN 7189: 2009</li> <li>● VCCI: V-3/2012.04</li> </ul> <p>Immunity:</p> <ul style="list-style-type: none"> <li>● CISPR24: 2010 [+ amd 1 &amp; 2] <ul style="list-style-type: none"> <li>○ EN300386: V1.6.1</li> <li>○ EN55024: 2010</li> <li>○ EN61000-6-1: 2007</li> <li>○ KN24: 2011</li> <li>○ TCVN 7317:2003</li> </ul> </li> </ul>
Environmental operating range	<ul style="list-style-type: none"> <li>● Nonoperating temperature: -40° to 158°F (-40° to 70°C)</li> <li>● Nonoperating humidity: 5% to 95% relative humidity (noncondensing)</li> <li>● Nonoperating altitude: 0 to 15,000 ft (0 to 4570 m)</li> <li>● Operating temperature: 0° to 50°C (de-rate 1°C per 1000-ft increase in altitude)</li> <li>● Operating humidity: 5% to 95% relative humidity (noncondensing)</li> <li>● Operating altitude: 0 to 10,000 ft (0 to 3000 m)</li> </ul>

## Want to Buy

---

Order Now

Get a Quote

## Why Router-switch.com

---

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

## Contact Us

---

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: [sales@router-switch.com](mailto:sales@router-switch.com)